



## エスロン ユニオン継手

### ●コンパクトタイプ (TSソケット、PVDF変換継手)

#### ●TSソケット

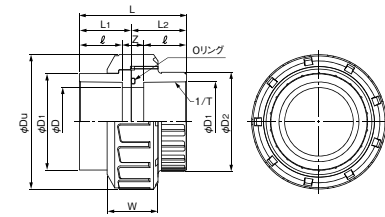


ねじ変換タイプ




- 面管寸法がコンパクトで、省スペース配管ができます。
- 実績のある台形ねじで、手締めで高い止水性を発揮し、しっかりとグリップします。

#### ■他のユニオン製品との互換性

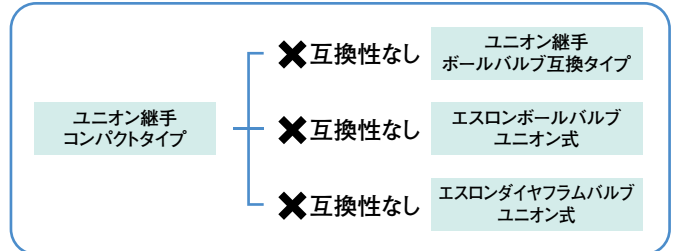

※ねじ変換タイプは、PVCのみの品揃えです。

#### ●PVDF変換継手




#### ■寸法表

材質：PVC・HT (C-PVC)


単位:mm

呼び径		TS受口 (PVC, HT)					ねじ受口 (PVC)					PVDF変換受口 (PVC, HT)				L <sub>2</sub>	d	Du	D <sub>1</sub>	D <sub>2</sub>	W	Oリング
A	B	d <sub>1</sub>	1/T	Z	ℓ	L <sub>1</sub>	L	Rc	Z	ℓ <sub>2</sub>	L	D <sub>1</sub>	t	ℓ <sub>1</sub>	L							
13	3/8	18.3	1/30	6	18	20	42	3/8	9	15	42	-	-	-	-	22	13	40	24	26	17	P-16
16	1/2	22.3	1/37	8	22	25	52	1/2	15	15	52	20	1.9	30	72	27	15	46	30	32	20	P-20
20	3/4	26.3	1/42	9	25	28	59	3/4	18	16	59	25	1.9	24	76	31	20	54	35	37	23	P-24
25	1	32.3	1/44	9	29	32	67	1	13	25	67	32	2.4	24	81	35	25	67	43	45	28	P-30
30	1 1/4	38.4	1/37	12	32	36	76	1 1/4	11	33	76	40	2.4	25	85	40	31	78	53	55	31	P-36
40	1 1/2	48.5	1/38	12	35	39	82	1 1/2	18.5	28.5	82	50	3.0	24	93	43	40	87	61	63	42	P-46
50	2	60.6	1/34	16	38	43	92	2	21	33	92	63	3.0	28	104	49	51	107	76	78	43	P-58
65	2 1/2	76.6	1/38	18	45	52	108	2 1/2	31	32	108	-	-	-	-	56	65	128	90	93	50	P-71
75	3	89.6	1/40	24	48	58	120	3	35	37	120	-	-	-	-	62	77	151	108	111	57	P-85
100	4	114.7	1/42	36	58	72	152	4	49	45	152	-	-	-	-	80	100	185	132	136	72	P-112

### ●ボールバルブ互換タイプ



#### ■他のユニオン製品との互換性

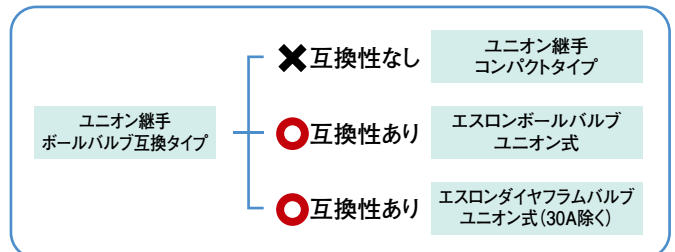

#### ■寸法表

材質：PVC・HT (C-PVC)

単位:mm

呼び径		TS受口			L	L <sub>2</sub>	L <sub>1</sub>	Z	d	Du	D <sub>1</sub>	D <sub>2</sub>	W	Oリング
A	B	d <sub>1</sub>	1/T	ℓ										
16	1/2	22.3	1/37	22	59	29	30	13	16	49	33	31	24	P-20
20	3/4	26.3	1/42	25	68	35	33	16	20	59	35	36	26	P-24
25	1	32.3	1/43	29	78	36	42	20	25	67	44	44	31	P-30
30	1 1/4	38.4	1/37	32	90	44.5	45.5	26	30	81	54	54	31	P-36
40	1 1/2	48.5	1/38	35	94	42	52	24	40	98	65	67	40	P-48A
50	2	60.6	1/34	38	110	48	61	34	50	120	77	79	43	P-56