


COMPACT FLANGE

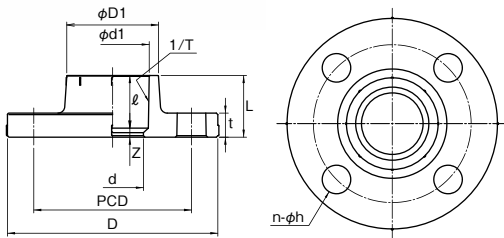

Size

JIS 10K Material : PVC and HI

Unit:mm

Size		TS Socket				L	Z	d	Flange				Applicable Bolt	Weight (PVC) kg/pc	
A	B	d1	ℓ	1/T	D1				PCD	D	t	n-h			
25	1	32.3	29	1/43	40	34	5	25	90	125	14	4-19	M16	55	0.22
32	1 1/4	38.4	32	1/37	48	38	6	31	100	135	16	4-19	M16	60	0.29
40	1 1/2	48.5	35	1/38	61	41	6	41	105	140	16	4-19	M16	60	0.32
50	2	60.6	38	1/34	73	45	7	52	120	155	20	4-19	M16	70	0.47

·Flange dimensions conform to JIS B2220.

·Usable maximum temperature is 60°C for PVC Flange.