


ESLON PVDF



- Excellent chemical resistance in high temperature.
- Excellent UV & gamma ray resistance.
- Excellent abrasion resistance, mechanical properties, and electrical isolation.

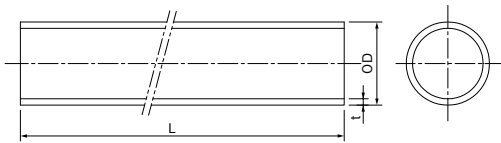

PIPE

Unit:mm

Size	OD	t	L
A			
15	20	1.9	5000
20	25	1.9	5000
25	32	2.4	5000
32	40	2.4	5000
40	50	3.0	5000
50	63	3.0	5000
65	75	3.6	5000
80	90	4.3	5000
100	110	5.3	5000
125	140	4.3	5000
150	160	4.9	5000
200	225	6.9	5000

Fitting Products List

Size [A]	OD [mm]	90°Bend	45°Elbow	Tee	Cap
15	20	○	○	○	○
20	25	○	○	○	○
25	32	○	○	○	○
32	40	○	○	○	○
40	50	○	○	○	○
50	63	○	○	○	○
65	75	○	—	○	○
80	90	○	○	○	○
100	110	○	○	○	○
125	140	○	○	○	—
150	160	○	○	○	—

Reducing Fittings Products List

Size [A]	OD [mm]	Tee	Reducer	Size [A]	OD [mm]	Tee	Reducer
20×15	25×20	—	○	50×40	63×50	—	○
25×15	32×20	—	○	65×40	75×50	—	○
25×20	32×25	—	○	65×50	75×63	—	○
30×15	40×20	—	○	80×50	90×63	○	○
30×20	40×25	—	○	80×65	90×75	—	○
30×25	40×32	—	○	100×50	110×63	○	○
40×15	50×20	—	○	100×80	110×90	○	○
40×20	50×25	—	○	125×100	140×110	—	—
40×25	50×32	—	○	150×50	160×63	○	—
40×32	50×40	—	○	150×80	160×90	○	—
50×25	63×32	○	○	150×100	160×110	○	○
50×32	63×40	—	○	150×125	—	—	○

Others Products List

Size [A]	OD [mm]	Stub Flange	Backing Ring PP+SS	Union FPM
15	20	○	○	○
20	25	○	○	○
25	32	○	○	○
32	40	○	○	○
40	50	○	○	○
50	63	○	○	○
65	75	○	○	—
80	90	○	○	—
100	110	○	○	—
125	140	○	○	—
150	160	○	○	—

Size [A]	OD [mm]	Female Adapter	Male Adapter
15×1/2	20	○	○
20×3/4	25	○	○
25×1	32	○	○
32×1 1/4	40	○	○
40×1 1/2	50	○	○
50×2	63	○	○

*Dimension of Backing ring : JIS 10K