



Eslon Plant Hyper BK (PE100)

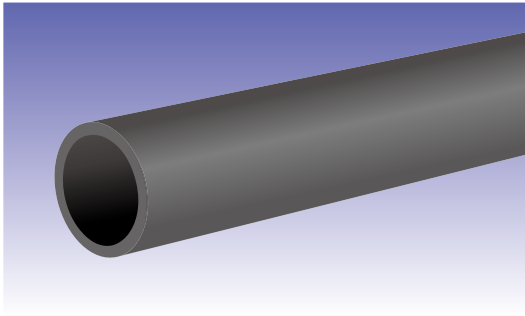

- Excellent earthquake resistance.
- Excellent chemical resistance.
- Highly UV resistance.Suitable for exposed piping.
- Easy to installation.

Use

- For acid and alkali line
- industrial water
- sea water

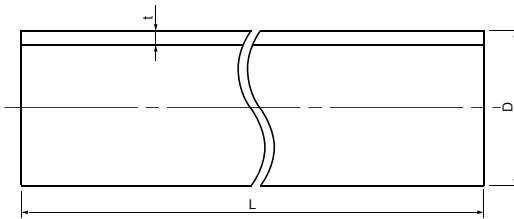

Size

單位:mm

Size	SDR	D	t	L	Weight (kg/m)
A					
50	11	63	5.8	5000	1.06
75	17	90	5.4	5000	1.47
100	17	125	7.4	5000	2.78
150	17	180	10.7	5000	5.76
200	17	250	14.8	5000	11.00
250	17	315	18.7	5000	17.40
300	17	355	21.1	5000	22.20

· SDR=D/t

Product List Fitting

Size (A)	OD (Tolerance) (mm)	90°Elbow		45°Elbow		Tee		Reducer		Short pipe with Flange (F type,G type,10K)		Socket	
		SP	EF	SP	EF	SP	EF	SP	EF	SP	EF	SP	EF
50	63	-	○	-	○	-	○	○	-	-	-	-	○
75	90	-	○	-	○	-	○	○	-	-	○	-	○
100	125	-	○	-	○	-	○	○	-	-	○	-	○
150	180	○	-	○	-	○	-	○	-	-	○	-	○
200	250	○	-	-	-	○	-	○	-	-	○	-	○
250	315	○	-	-	-	○	-	○	-	-	○	-	○
300	355	○	-	-	-	○	-	○	-	-	○	-	○

·SP indicates "spigot",EF indicates "Electrical Fusion".
 ·For special order,please contact us.

Working Pressure and Temperature

