


Eslon UVS-VP

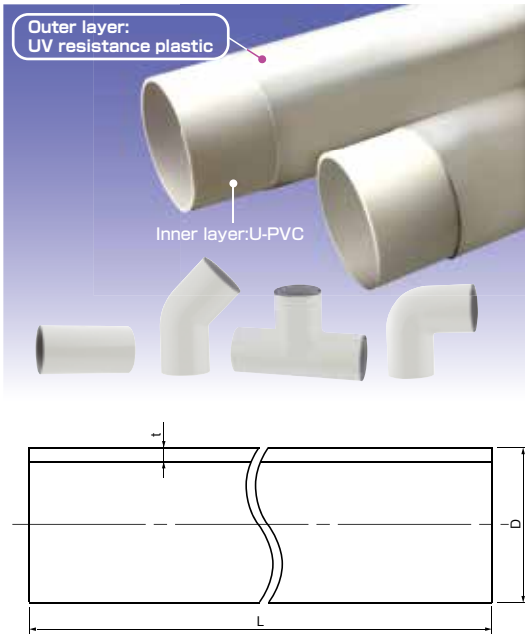

- High UV disability surface of UVS is coated by UV resistance plastic.
- Long life and LCC effective.
- No painting needed. Suitable for exposed piping.


Size

unit:mm

Size	D	t	Approximate Inner diameter	L	Weight (kg/m)
A					
20	26.3	2.7	20	4000±10	0.310
25	32.3	3.1	25		0.448
40	48.2	3.6	40		0.782
50	60.2	4.1	51		1.122
65	76.3	4.1	67		1.445
75	89.3	5.5	77		2.202
100	114.3	6.6	100		3.409
125	140.3	7	125		4.464
150	165.3	8.9	146		6.701
200	216.3	10.3	194		10.129

Evaluation for Impact strength

Impact strength decrease only 10% after accelerating evaluation to UV exposure for 10 years.

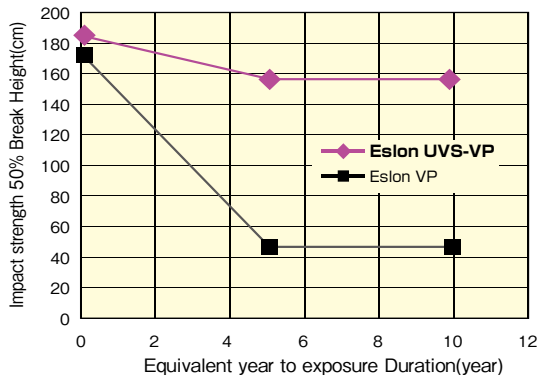

Appearance of pipe outside surface

※After Accelerated Weathering Test



Evaluation method for Laminating strength

※Tape on cross cut-paint, and peel off the tape 5 time repeatedly.




Paint remain

All cut paint pc remain

※Cross-cut peeling test(JIS K5600-5-6)

Maximum allowable Pressure

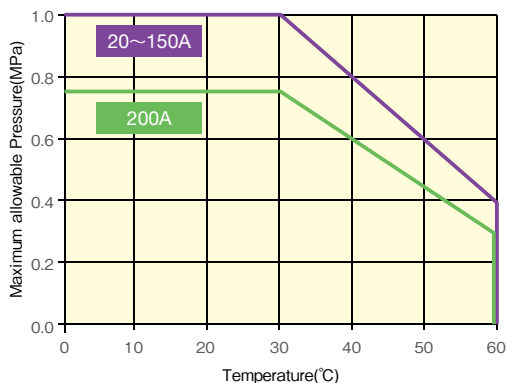

Product List Fitting

Size	90°Elbow	45°Elbow	Tee	Socket	Flange
20	○	○	○	○	○
25	○	○	○	○	○
40	○	○	○	○	○
50	○	○	○	○	○
65	○	○	○	○	○
75	○	○	○	○	○
100	○	○	○	○	○
125	○	○	○	○	○
150	○	○	○	○	○
200	○	○	○	○	○

*Reducing Coupling and Reducing Tees are available.